


Copper Pipe

Copper Bus Pipe, Regular, Sch 40

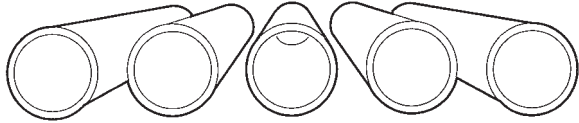

- UNS Designation Numbers: UNS C11000
- Nominal Chemicals: Copper 99.9%
- Average Physical Properties: Tensile 40,000 psi, Elongation 3%, Hardness F80, Temper H80 (Hard Drawn)
- Electrical Conductivity: 101% IACS
- Specifications: ASTM B 188, Temper H80 (Hard Drawn)
- Stocked in 20 foot lengths

Nominal Pipe Size	OD	Wall	Lbs/Ft	Lbs/20 Ft Length	Part Number
1/2	.840	.108	.955	19.100	489979
3/4	1.050	.127	1.820	36.400	431544
1	1.315	.127	1.820	27.300	439916*
1	1.315	.127	1.820	36.400	269921
1 1/4	1.660	.146	2.690	53.800	433821
1 1/2	1.900	.150	3.200	64.000	269939
2	2.375	.157	4.220	84.400	475815
2 1/2	2.875	.188	6.120	122.400	137182
3	3.500	.219	8.760	175.200	486670
3 1/2	4.000	.250	11.420	228.400	439403
4	4.500	.250	12.940	155.280	509169*
4	4.500	.250	12.940	258.800	497388
6	6.625	.250	19.400	232.800	137239**
6	6.625	.250	19.400	232.800	452168*
8	8.625	.313	31.630	379.600	137247*

*12 Ft Length. ** Phosphor deoxidized.

Copper Bus Pipe, Extra Strong, Sch 80

- UNS Designation Numbers: UNS C11000
- Nominal Chemicals: Copper 99.9%
- Average Physical Properties: Tensile 40,000 psi, Elongation 3%, Hardness F80, Temper H80 (Hard Drawn)
- Electrical Conductivity: 101% IACS
- Specifications: ASTM B 188, Temper H80 (Hard Drawn)
- Stocked in 20 foot lengths

Nominal Pipe Size	OD	Wall	Lbs/Ft	Lbs/20 Ft Length	Part Number
1/2	.840	.149	1.250	25.000	137297
1	1.315	.182	2.510	50.200	259675
1 1/4	1.660	.194	3.460	69.200	137336
1 1/2	1.900	.203	4.190	83.800	137344
2	2.375	.221	5.800	116.000	497867
2 1/2	2.875	.280	8.850	177.000	505123
3	3.500	.304	11.800	236.000	137378
4	4.500	.341	17.300	207.600	137394

Dimensions are in inches. All weights are approximate.
 Sizes not shown may be available upon request.