


ASME Flanged and Dished Heads

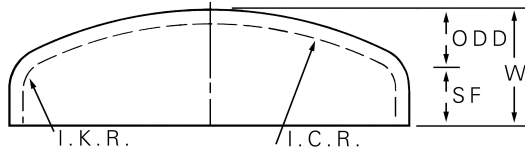

Nominal Pipe Size	OD	ODD	SF	W
2	2.375	$1^{3/16}$	$1/2$	$1^{5/16}$
2 1/2	2.875	$7/8$	$1/2$	$1^{3/8}$
3	3.500	$1^{5/16}$	$1/2$	$1^{7/16}$
4	4.500	$1^{1/16}$	$1/2$	$1^{9/16}$
5	5.563	$1^{3/16}$	$1/2$	$1^{11/16}$
6	6.625	$1^{13/16}$	$1/2$	$2^{5/16}$
8	8.625	$2^{1/16}$	$1/2$	$2^{9/16}$
10	10.75	$3^{1/2}$	$1/2$	$2^{13/16}$
12	12.75	$2^{5/8}$	$1/2$	$3^{1/8}$
14	14.00	$2^{3/4}$	$1/2$	$3^{1/4}$
16	16.00	3	$1/2$	$3^{1/2}$
18	18.00	$3^{5/16}$	$1/2$	$3^{13/16}$
20	20.00	$3^{5/8}$	$1/2$	$4^{1/8}$
24	24.00	$4^{1/4}$	$1/2$	$4^{3/4}$
30	30.00	$5^{5/16}$	$1/2$	$5^{13/16}$
36	36.00	$6^{5/16}$	$1/2$	$6^{13/16}$

Inside knuckle radius (I.K.R.) minimum = 6% of outside diameter or 3T whichever is greater.

Inside crown radius (I.C.R.) shall not exceed the outside diameter.

"SF" refers to straight flange length normally supplied, however special SF lengths can be provided. "W" refers to nominal height normally supplied.

"ODD" refers to outside depth of dish. Dimensions are in inches.

Available in "regular" thickness (similar to Schedule 40s).